



jwell·MFH

地址：江苏省常州市溧阳溧城镇上上路 118 号 邮编 (p.c.): 213300

Add: No.118, shangshang Road, Licheng Town, Liyang, Changzhou city, China.

Tel: +86-519-87958588 Fax: +86-519-87958688

+86-13916072508 +86-13732615566

E-mail: salck@jwell.cn infzzk@jwell.cn sales@jwell.cn

www.jwell-mfh.com



常州金纬管道科技有限公司
CHANGZHOU JWELL PIPE EQUIPMENT TECHNOLOGY CO., LTD.

金纬机械溧阳厂区



Jwell Pipe Equipment Technology

常州金纬管道科技有限公司是一家定位高端的全新研发型科技有限公司，成立于2016年4月，为金纬旗下管道设备的高端系列，依托金纬机械常州基地强大的机械加工设备及人才，以全新理念设计研发的MFH系列聚烯烃(PO)高效节能管材($\Phi 8-\Phi 1600\text{mm}$)挤出生产线、双向拉伸聚氯乙烯(OPVC)管材($\Phi 110\text{mm}-\Phi 630\text{mm}$)挤出生产线，设备具有高产量、低能耗、良好的熔体均质性及长

期运行的稳定性，采用模块化设计方案为产品的系列化、通用性提供便利，在如何节省原材料、提高自动化程度、确保高产出率、高品质精密挤出及为用户量身定制的极具竞争力的产品等方面都提供了完美的整体系统解决方案。

常州金纬管道科技有限公司

CHANGZHOU JWELL PIPE EQUIPMENT TECHNOLOGY CO., LTD.



Changzhou JWELL Pipe Equipment Technology Co.,Ltd., founded in April 2016, is a new high-end R&D company. JWELL's high-end products. Supported by JWELL Machinery's powerful Changzhou base and human resources, the MFH series polyolefin (PO) high-efficient and energy-saving pipe ($\Phi 8-\Phi 1600\text{mm}$) extrusion line and the biaxially oriented polyvinyl chloride (OPVC) pipe ($\Phi 110\text{mm}-\Phi 630\text{mm}$) extrusion line, both designed and developed with brand-new rationale, have such merits

科技是未来的生产力

“品质卓越 完美如一”

是金纬公司的质量方针，是全体员工努力的方向。

“诚实待人”

是我们铸就“百年金纬”的核心理念。

董事长:何海潮 E-mail:he@jwell.cn
President:He Haichao Mobile /WhatsApp +86 13601628188



as high output, low energy consumption, excellent melt homogeneity, and long-term operation stability. Their modular design creates the condition for exchangeability among products and for producing products in series. A perfect and complete system solution is provided that satisfies the need for reducing raw material consumption, improving automation, ensuring high productivity and high quality and precision extrusion, and customized manufacturing of competitive products.

science and technology constitute the primary productive force for future

“Excellent Quality, Perfect All”

Is Jwell's quality policy, and all staff's working direction.

“Be Honest”

Is the core idea for us to contribute
“Century JWELL”



您的塑料管材挤出方案的最佳合作伙伴 The Best Partner For Your Plastic Pipe Extrusion

常州金纬管道科技为您提供 MFH 系列管材成套设备

无论您想生产哪种管材——单层或多层 PO 管材、PO 双壁波纹管、UPVC、CPVC、OPVC 管，MFH 均可为您提供个性化的产品定制方案。

聚烯烃 (PO) 管材高速生产线具备以下特点：1、先进的 SIEMENS 电脑控制系统实现整线的集成及闭环控制，便于数据的分析（能耗显示及分析）、远程的诊断（快速的售后服务）、设备保养提醒（人性化提醒）、原材料的节约（先进的米重控制技术将管材壁厚保持在非常窄的公差范围内）等；2、采用了螺旋开槽喂料机筒、38 长径比的 BM 加屏障混炼结构螺杆相组合的设计，可获得聚烯烃材料高产量的同时亦获得较高的管材质量，选用硬质合金镀层的螺杆和双金属机筒保证了高效率下的长期可靠的使用；3、高扭矩精密减速机及交流变频或永磁伺服电机的采用，确保长期高挤出产量的稳定及优异的能耗表现；4、优化设计的高速模具、碟片或湿式定径套在满足高速生产的同时确保制品的高质量；5、独特的变频真空自动控制装置完美解决了噪音、节能及保证了制品尺寸稳定；6、配备伺服电机驱动的牵引机确保了宽的牵引范围、高精度的同步运行并采用了数字化的主机通讯接口；7、配置稳定完美切口飞刀（小口径）、无屑及双刀（大口径）切割机。

玛菲赫管材挤出生产线中的所有单元和控制系统经过设计均可在实现最少的材料消耗量的同时使产品维持稳定的高质量。我们是高效节能生产所有类型管材的最佳合作伙伴。

Changzhou JWELL Pipe Equipment Technology Co., Ltd. provides MFH series complete pipe equipment.

No matter what kind of pipe you want to produce - single or multi-layer PO pipe, PO double wall corrugated pipe, UPVC, CPVC, OPVC pipe, JWELL MFH can provide personalized lines solutions.

The high-speed production line of polyolefin (PO) pipes has the following characteristics: 1. The advanced SIEMENS computer control system realizes the integration and closed-loop control of the whole line, easy for analysis of data (energy consumption display and analysis), remote diagnosis (fast after-sales service), equipment maintenance reminder (humanized reminder), raw materials section(the advanced meter-weight control technology keeps the wall thickness of the tube in a very narrow tolerance range); 2. Using spiral grooving feeding barrel and screw used 38 L/D ratio, with the design of the combination of BM which can obtain high output of polyolefin materials and high quality of pipe. Used hard alloy plating layer screw and bimetallic barrel guarantee the long-time reliable high efficiency using; 3. With high torque precision reducer and AC inverter or permanent magnet servo motor, ensure the stable and excellent energy consumption performance of long-term under the high extrusion output; 4. Optimize the design of high speed mold, disc or wet sizing sleeve to ensure the high speed running and the high quality of products; 5. The unique variable frequency vacuum automatic control device perfectly solves the noise, ensure energy saving and guaranteed product dimension stability; 6,The servo motor driven tractor ensures wide traction range, high precision synchronous operation and adopts digital host communication interface. 7. With stable configuration perfect incision flying knife (small diameter), no chip and double knife (large diameter) cutting machine.

All units and control systems in JWELL MFH pipe extrusion line can be designed to achieve the minimum material consumption while ensure the high quality of the pipe. We are the best partner to produce all types of pipes with energy-efficient.



挤出机械物联网 + 智能制造解决方案

Plastic Machinery Fully Integrated Automation + Internet Of Things Control System Solutions

① 研发生产融合 R&d and production integration

打通产品研发与生产的通路，实现研发与生产的信息、工艺、标准、指标值的深度融合
Work out the development and production of products, realize deep integration of development and production information, technology, standards and index

② 虚拟制造 Virtual manufacture

充分利用虚拟生产与验证平台，对车间生产、物流、质量、设备管理等资源充分验证
Make full use of the virtual production and verification platform to fully verify the workshop production, logistics, quality, equipment management and other resources

③ 智能装备 & 物联 Intelligent equipment & thing connection

推行智能化装备，实现多接口、多协议的设备物联，实时获取设备工况信息与参数，预测故障，提升连续性
Implement intelligent equipment, realize multi-interface and multi-protocol equipment thing connection, obtain the real time information and parameters of the equipment, predict faults and improve continuity

④ 计划排程 Planning schedule

根据销售预测与订单诉求，平衡车间产能，合理安排生产，减少瓶颈问题，提高整体生产效率
According to sales forecast and order demands, balance workshop production capacity, arrange production properly, reduce bottleneck problems and improve overall production efficiency



⑤ 智能物流 Intelligent logistics

物流软硬件综合应用的智能物流提醒，减少物流瓶颈，提高物流配送精准率，减少停工待料
Logistics software and hardware integrated application of intelligent logistics to remind, reduce logistics bottleneck, improve logistics delivery precision rate, reduce shutdown stop

⑦ 质量管控 Quality control

基于仪器物联，获取质量数据，精准预测质量趋势，有效控制质量缺陷，提升产品质量水平
Based on instrumentation, obtain quality data, accurately predict quality trends, control quality defects effectively, and improve product quality class.

⑧ 制造过程 Manufacturing process

利用技术手段，实现制造过程透明化，敏捷响应制造中的各类异常，保证生产有序执行。
Make use of technical means to realize the transparency of manufacturing process, and quick respond to all kinds of abnormal in the manufacturing process to ensure the orderly execution of production.


⑨ EHS 合规 EHS compliance

按照行业标准，构建 EHS 车间环境参数监测，为产品制造提供适宜的基础环境
According to the industry standard, build EHS workshop environment parameter monitoring, and provide the suitable base environment for product manufacturing

⑩ 协同与决策 Synergy and decision making

解决信息不对称，减少沟通成本，支撑协同制造，基于数据的生产决策，决策过程直观、合理
Solve information asymmetry, reduce communication cost, support collaborative manufacturing, make decision based on data, make the decision process intuitive and reasonable



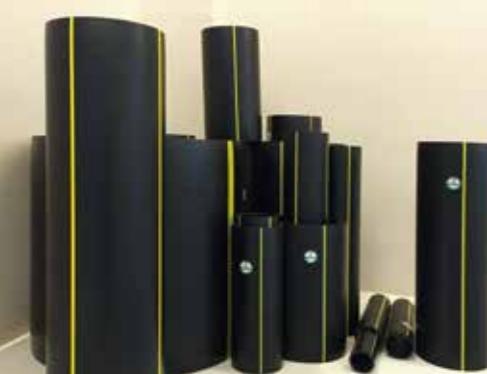

MFH 系列 HDPE 聚乙烯给水管、燃气管高速节能挤出生产线

MFH Series HDPE Water Supply Pipe/Gas Pipe Energy-Saving And High Speed Extrusion Line

设备简介：

该生产线主要用于生产单层聚乙烯给水管材 (GB/T13663-2018) 及燃气管材 (GB/T15558-2003) 更换部分单元亦可生产 PP 给水管材 (QB/T1929-1993)。

该生产线外形美观 ,具有极高的性价比 ,相比传统设备更高的产能、更低的吨能耗 ,更精密的挤出 ,是替代进口品牌设备的最佳选择。

Brief introduction of equipment:

The production line is mainly used to produce single layer Poly (butylene water supply pipe (GB/T13663-2018) and gas pipe (GB/T15558-2003), replaced some units can produce PP water supply pipe (QB/T1929-1993).

The product line has a good appearance and high cost performance compared to the traditional equipment. The line is higher capacity and lower tons-consumption, more precise extrusion, that is the best alternative to imported brand equipment.

主要技术参数 Main technical parameter

生产线型号 Line Type	主机型号 Extruder Type	生产范围 Pipe Range(mm)	最大牵引速度 Max. Speed (m/min)	最大生产能力 Max.Capacity(kg/h)
MFH-PE32G	MFH-60/38E1	8-32	50	210-300
MFH-PE63G	MFH-60/38E2	6-63	40	250-360
MFH-PE110G	MFH-60/38E3	20-110	30	300-440
MFH-PE110B	MFH-60/38E3	40-110	20	300-440
MFH-PE160G	MFH-75/38E1	20-160	25	360-520
MFH-PE160B	MFH-75/38E1	50-160	15	360-520
MFH-PE250G	MFH-75/38E2	75-250	8	450-640
MFH-PE315G	MFH-75/38E3	110-315	6	520-740
MFH-PE450G	MFH-90/38E1	160-450	2.4	620-880
MFH-PE500G	MFH-90/38E2	160-500	2.4	700-1000
MFH-PE630G	MFH-120/38E1	315-630	1.6	880-1250
MFH-PE800G	MFH-120/38E2	400-800	1	990-1400
MFH-PE1000G	MFH-120/38E2	500-1000	1	990-1400
MFH-PE1200G	MFH-150/38E1	630-1200	0.8	100-1600
MFH-PE1600G	MFH-150/38E2	1000-1600	0.6	1250-1800

备注 :以上规格参数如有变更 ,恕不另行通知。Note:The specifications are subject to change without prior notice.





jWELL·MFH



CE TÜV CERT
ISO9001:2015

MFH 系列 PO(PP-R、PE-RT、PB) 聚烯烃地暖管高速节能挤出生产线

Mfh Series PO(PP-R, PE-RT, PB) Pipe Energy-Saving And High Speed Extrusion Line

设备简介：

该生产线主要用于生产聚丙烯冷热水管材 (GB/T18742.2-2002) 更换或增加部分单元亦可生产耐热聚乙烯冷热水管材 (GB/T28799.2-2012) 及聚丁烯冷热水管材 (GB/T19473.2-2004)，特别设计的专用螺杆更适合 PP-R、PE-RT 及 PB 管材的高速稳定生产。


Brief introduction of equipment:

The production line is mainly used to produce PP cold and hot water pipes (GB/T18742.2-2002). To replace or add some units can also produce heat resistant polyethylene cold and hot water pipes (GB/T28799.2-2012) and polybutene cold and hot water pipes. The specially designed screw is more suitable for PP-R, PE-RT and PB pipes with high speed and stable production.

主要技术参数 Main technical parameter

生产线型号	主机型号	生产范围	最大牵引速度	最大生产能力	备注
Line Type	Extruder Type	Pipe Range(mm)	Max. Speed (m/min)	Max.Capacity(kg/h)	Remarks
MFH-PO32G	MFH-60/38P1	8-32	50	200-280	用于生产 PP-R、PE-RT、PB
MFH-PO63G	MFH-60/38P2	16-63	40	250-350	
MFH-PO110G	MFH-60/38P3	20-110	30	280-420	
MFH-PO110B	MFH-60/38P3	40-110	20	280-420	用于生产 PP-R、PE-RT
MFH-PO160G	MFH-75/38P1	20-160	25	320-500	
MFH-PO160B	MFH-75/38P1	50-160	15	320-500	
MFH-PO250G	MFH-75/38P2	75-250	8	480-600	用于生产 PE-RT

备注：以上规格参数如有变更，恕不另行通知。Note:The specifications are subject to change without prior notice.

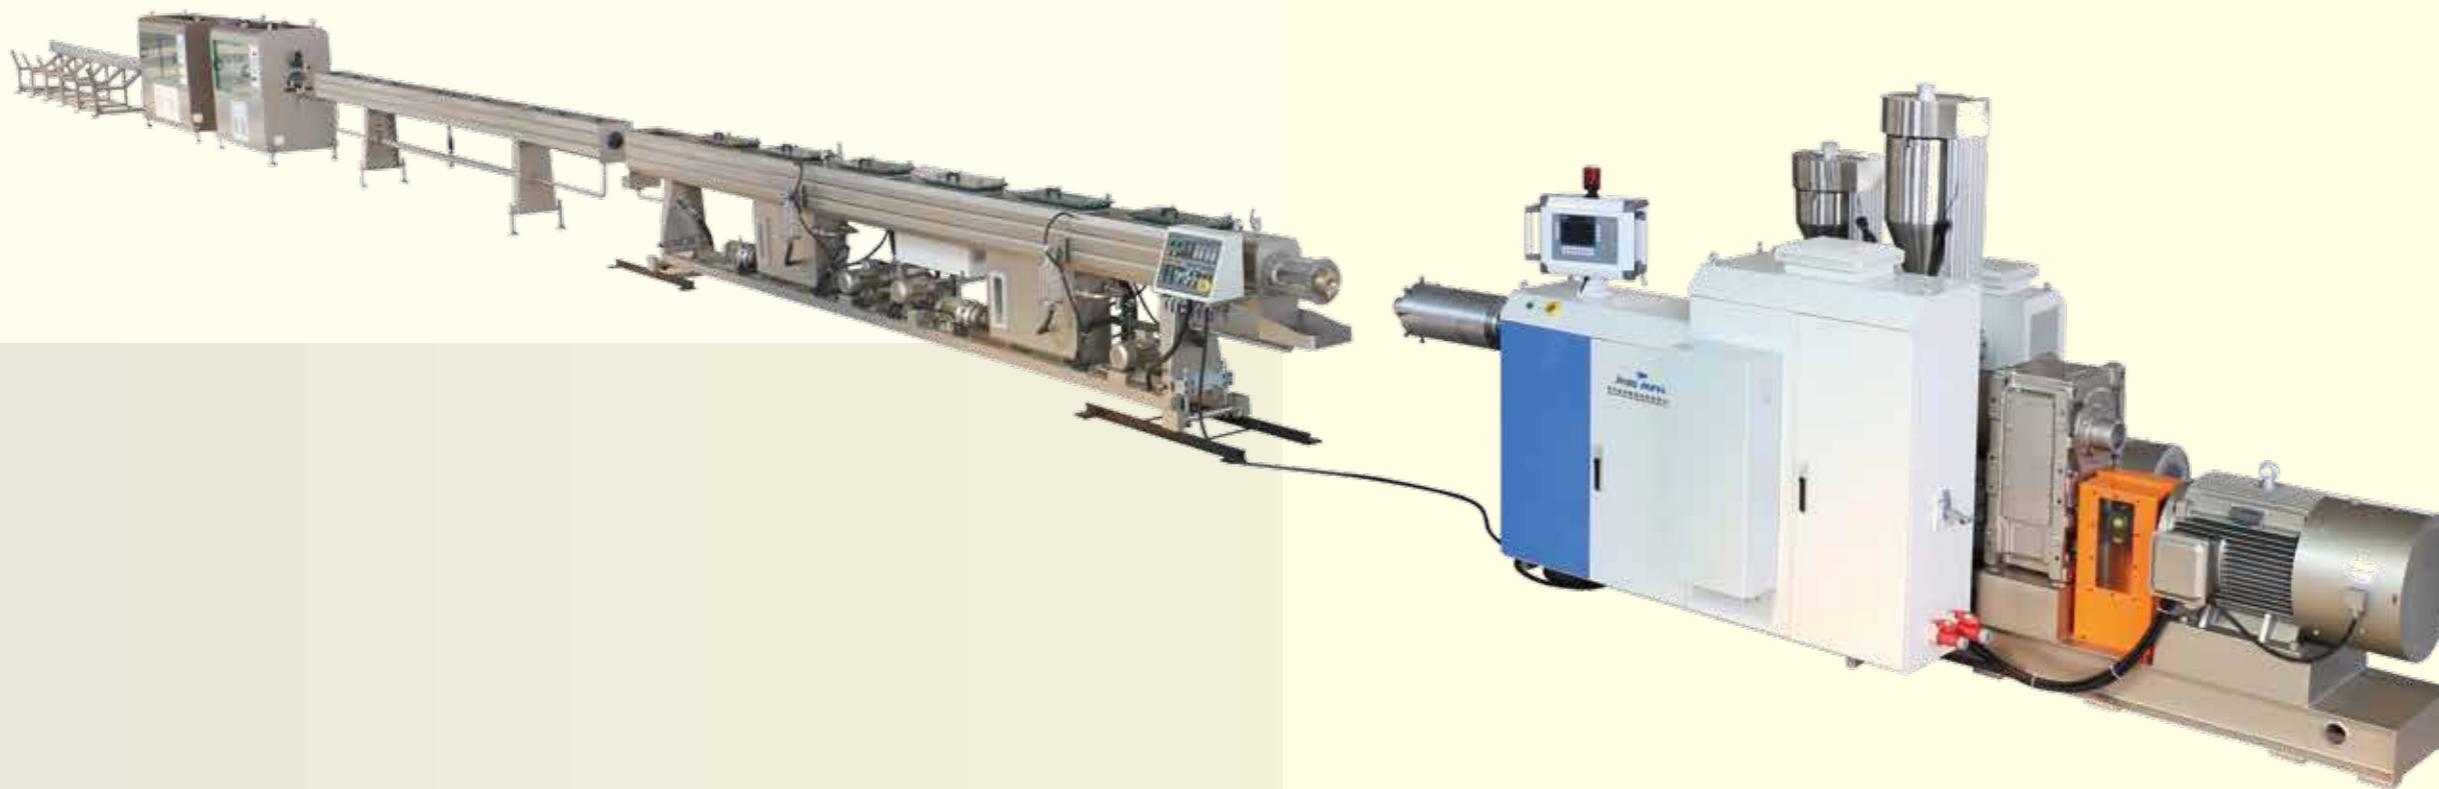



MFH 系列 MPP 改性聚丙烯电缆导管高速节能挤出生产线


MFH Series MPP Modified Polypropylene Cable Conduit High Speed Energy Saving Extrusion Production Line.

设备简介：

该生产线主要用于生产改性聚丙烯电缆导管 (DL/T802.7-2010) , 采用 MPP 专用螺杆 , 塑化效果好 , 确保非开挖管的拉伸强度的同时也保证管材高速生产。

Brief introduction of equipment:

The production line is mainly used to produce modified polypropylene cable conduit(DL/T802.7-2010).Using MPP special screw, the plasticizing effect is better, ensuring the tensile strength of the non-excavated pipe and high-speed.

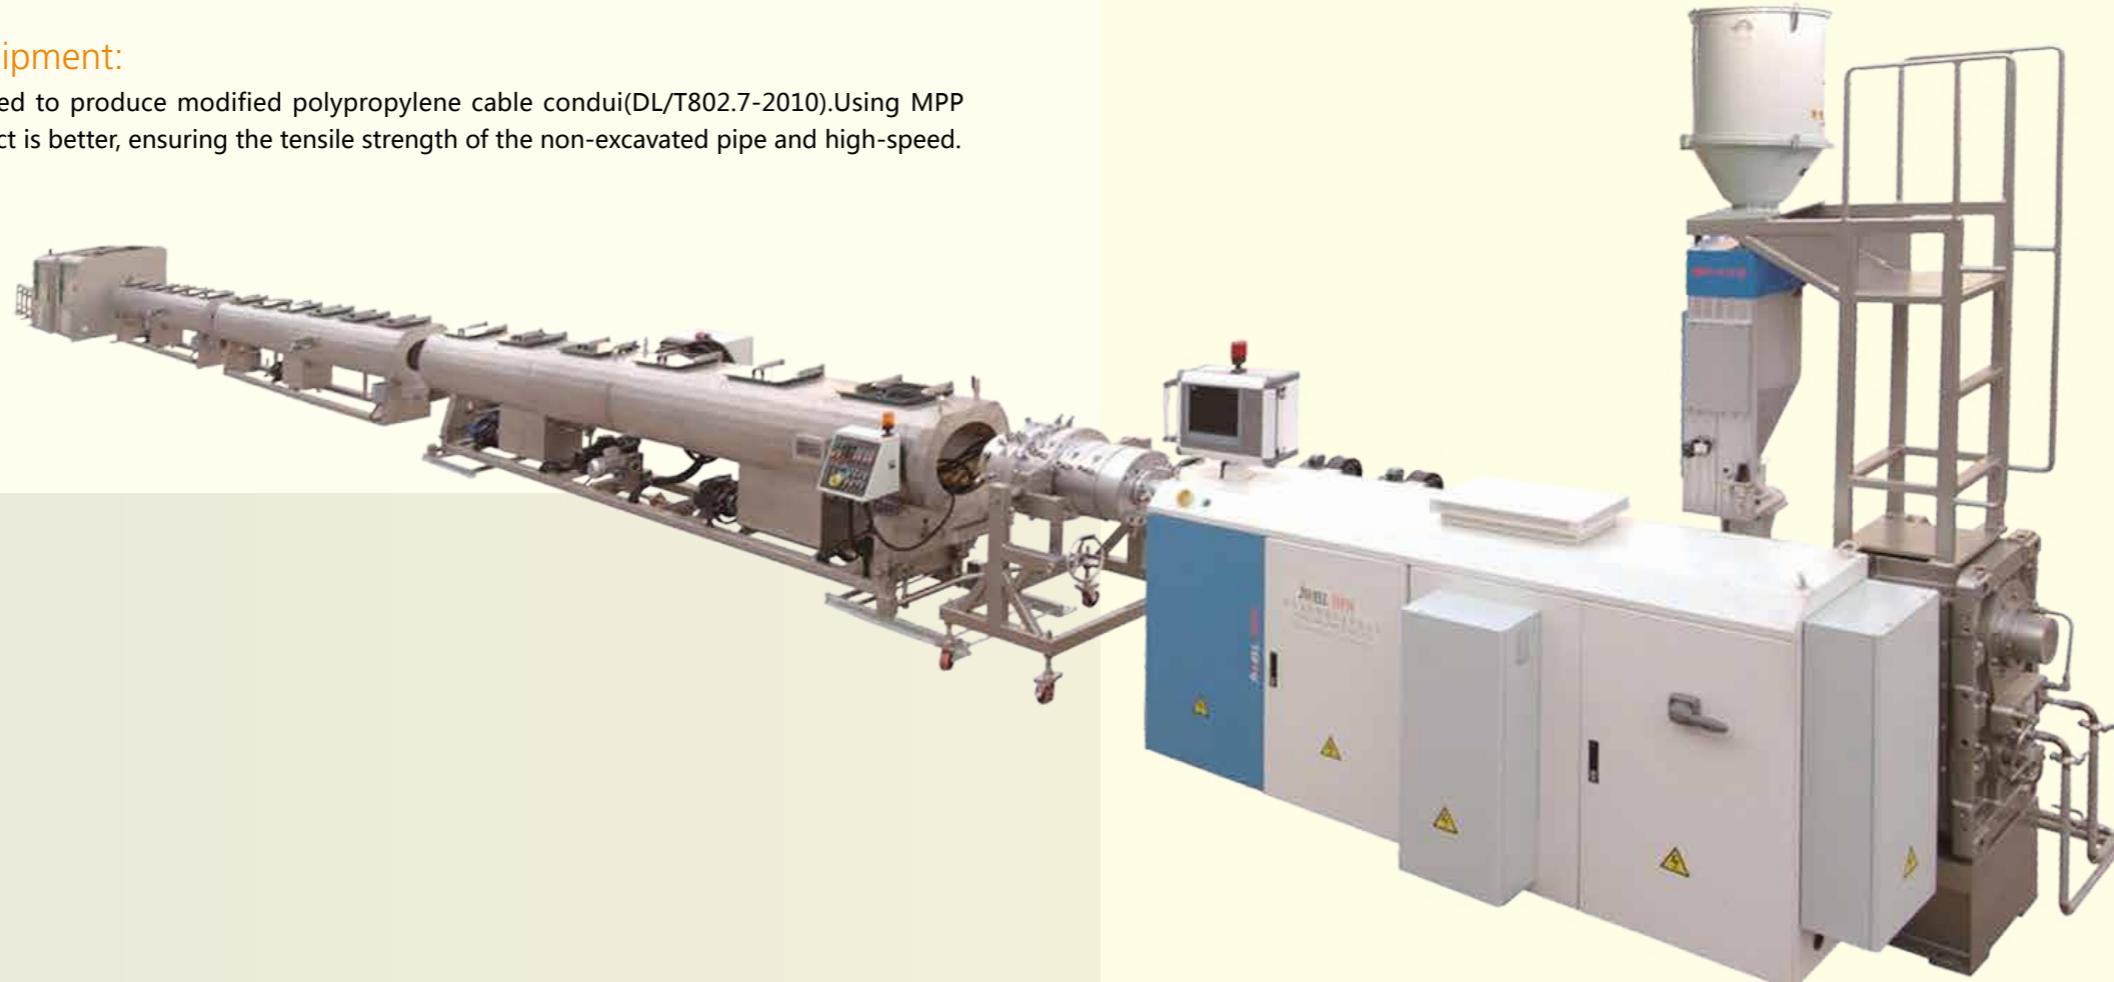

主要技术参数 Main technical parameter

生产线型号 Line Type	主机型号 Extruder Type	生产范围 Pipe Range(mm)	最大牵引速度 Max. Speed (m/min)	最大生产能力 Max.Capacity(kg/h)	备注 Remarks
MFH-MPP200G	MFH-75/38P1	100-200	8	280-400	
MFH-MPP250G	MFH-75/38P2	100-250	6	350-500	
MFH-MPP315G	MFH-75/38P3	100-315	5	420-600	

备注 : 以上规格参数如有变更 , 恕不另行通知。Note:The specifications are subject to change without prior notice.



MFH 系列 HDPE 聚乙烯多层共挤给排水管高速节能挤出生产线

MFH Series HDPE Multi-Layer Coextrusion Water Supply And Drainage Pipe High Speed Energy Saving Extrusion Production Line

设备简介：

该生产线主要用于生产两机两层(比例可调)、两机三层(内外壁厚比例可调)或三机三层(内外壁厚比例可调)等多功能聚乙烯给水管材(GB/T13663-2016)

Brief introduction of equipment:

The production line is mainly used two extruders making two layers (adjustable in proportion) or two extruders making three layers (adjustable inside and outside walls) or three extruders making three layers (adjustable inside and outside walls) multifunctional polyethylene water supply pipe(GB /T13663-2016)



主要技术参数 Main technical parameter

生产线型号 Line Type	主机型号 Extruder Type	生产范围 Pipe Range(mm)	最大牵引速度 Max. Speed (m/min)	最大生产能力 Max.Capacity(kg/h)
MFH-LLPE63G	MFH-45/38G3/ MFH-45/38G3	16-63	40	250-360
MFH-LSPE63G	MFH-60/38G1/ MFH-45/38G1	16-63	40	250-360
MFH-SSPE63G	MFH-60/38G1/ MFH-45/38G1(2 台)	16-63	40	250-360
MFH-LLPE110G	MFH-50/38G/ MFH-50/38G	20-100	30	300-440
MFH-LSPE110G	MFH-60/38G1/ MFH-45/38G2	20-100	30	300-440
MFH-SSPE110G	MFH-60/38G1/ MFH-45/38G1(2 台)	20-100	30	300-440
MFH-LLPE110B	MFH-50/38G/ MFH-50/38G	40-110	20	300-440
MFH-LSPE110B	MFH-60/38G1/ MFH-45/38G2	40-110	20	300-440
MFH-SSPE110B	MFH-60/38G1/ MFH-45/38G1(2 台)	40-110	20	300-440
MFH-LLPE160G	MFH-60/38G1/ MFH-60/38G1	20-160	25	360-520
MFH-LSPE160G	MFH-60/38G2/ MFH-45/38G3	20-160	25	360-520
MFH-SSPE160G	MFH-60/38G2/ MFH-45/38G1(2 台)	20-160	25	360-520
MFH-LLPE160B	MFH-60/38G1/ MFH-60/38G1	50-160	15	360-520
MFH-LSPE160B	MFH-60/38G2/ MFH-45/38G3	50-160	15	360-520
MFH-SSPE160B	MFH-60/38G2/ MFH-45/38G1(2 台)	50-160	15	360-520
MFH-LLPE250G	MFH-60/38G2/ MFH-60/38G2	75-250	8	450-640
MFH-LSPE250G	MFH-60/38G3/ MFH-45/38G3	75-250	8	450-640
MFH-SSPE250G	MFH-60/38G3/ MFH-45/38G1(2 台)	75-250	8	450-640
MFH-LLPE315G	MFH-60/38G2/ MFH-60/38G2	110-315	6	520-740
MFH-LSPE315G	MFH-75/38G1/ MFH-50/38G	110-315	6	520-740
MFH-SSPE315G	MFH-75/38G1/ MFH-45/38G1(2 台)	110-315	6	520-740
MFH-LLPE450G	MFH-60/38G3/ MFH-60/38G3	160-450	2.4	620-880
MFH-LSPE450G	MFH-75/38G2/ MFH-60/38G1	160-450	2.4	620-880
MFH-SSPE450G	MFH-75/38G2/ MFH-45/38G2(2 台)	160-450	2.4	620-880
MFH-LLPE500G	MFH-75/38G1/ MFH-75/38G1	160-500	2.4	700-1000
MFH-LSPE500G	MFH-75/38G3/ MFH-60/38G1	160-500	2.4	700-1000
MFH-SSPE500G	MFH-75/38G3/ MFH-45/38G2(2 台)	160-500	2.4	700-1000
MFH-LLPE630G	MFH-75/38G2/ MFH-75/38G2	315-600	1.6	840-1200
MFH-LSPE630G	MFH-90/38G1/ MFH-60/38G2	315-600	1.6	840-1200
MFH-SSPE630G	MFH-90/38G1/ MFH-45/38G3(2 台)	315-600	1.6	840-1200
MFH-LLPE800G	MFH-75/38G3/ MFH-75/38G3	400-800	1	980-1400
MFH-LSPE800G	MFH-90/38G2/ MFH-60/38G3	400-800	1	980-1400
MFH-SSPE800G	MFH-90/38G2/ MFH-50/38G(2 台)	400-800	1	980-1400
MFH-LLPE1000G	MFH-75/38G3/ MFH-75/38G3	500-1000	1	980-1400
MFH-LSPE1000G	MFH-90/38G2/ MFH-60/38G3	500-1000	1	980-1400
MFH-SSPE1000G	MFH-90/38G2/ MFH-50/38G(2 台)	500-1000	1	980-1400
MFH-LLPE1200G	MFH-90/38G1/ MFH-90/38G1	630-1200	0.8	1100-1600
MFH-LSPE1200G	MFH-90/38G3/ MFH-75/38G1	630-1200	0.8	1100-1600
MFH-SSPE1200G	MFH-90/38G2/ MFH-50/38G(2 台)	630-1200	0.8	1100-1600
MFH-LLPE1600G	MFH-90/38G2/ MFH-90/38G2	1000-1600	0.6	1250-1800
MFH-LSPE1600G	MFH-120/38G1/ MFH-75/38G2	1000-1600	0.6	1250-1800
MFH-SSPE1600G	MFH-120/38G1/ MFH-60/38G1(2 台)	1000-1600	0.6	1250-1800

备注：以上规格参数如有变更，恕不另行通知。Note:The specifications are subject to change without prior notice.



MFH 系列 PO(PP-R、PE-RT、PB) 聚烯烃一模双出管材高速节能挤出生产线

Mfh Series PO(PP-R, PE-RT, PB) Polyolefin One Die Double Outlet Tube High Speed Energy Saving Extrusion Production Line.

设备简介：

该生产线主要用于生产一模双出聚丙烯冷热水管材 (GB/T18742.2-2002) 更换或增加部分单元亦可生产耐热聚乙烯冷热水管材 (GB/T28799.2-2012) 及聚丁烯冷热水管材 (GB/T19473.2-2004)，特别设计的专用螺杆更适合 PP-R、PE-RT 及 PB 管材的高速稳定生产，选装集成米重及熔体泵实现速度米重的闭环控制。

Brief introduction of equipment:



The production line is mainly used for the production of a double extruded polypropylene cold and hot water pipe (GB/T18742-2002). To replace or add some units can also produce heat resistant polyethylene cold and hot water pipes (GB/T28799.2-2012) and polybutene cold and hot water pipes (GB/T19473.2-2004). The specially designed screw is more suitable for PP-R, PE-RT and PB pipes with high speed and stable production, and the integrated rice weight and melt pump are selected to realize the closed-loop control of rice weight. Used integrated weight control and melt pump system to realize the closed-loop control of the pipe meter weight.



主要技术参数 Main technical parameter

生产线型号 Line Type	主机型号 Extruder Type	生产范围 Pipe Range(mm)	最大牵引速度 Max. Speed (m/min)	最大生产能力 Max.Capacity(kg/h)	备注 Remarks
MFH-PO32S	MFH-75/38P2	8-32	50	480-600	
MFH-PO63S	MFH-75/38P3	16-63	40	480-740	
MFH-PO110S	MFH-90/38P1	20-110	30	480-880	

备注：以上规格参数如有变更，恕不另行通知。Note:The specifications are subject to change without prior notice.

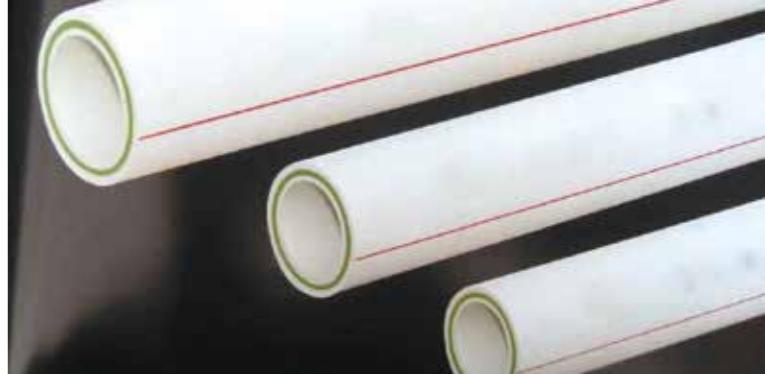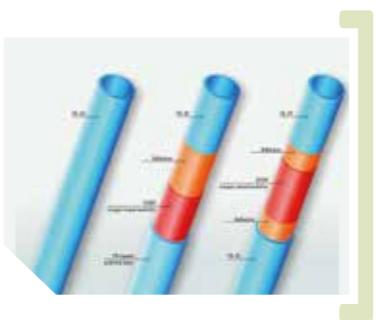

MFH 系列 PO(PE-RT、PB) 聚烯烃三层或五层阻氧管挤出生产线

Mfh Series PO(PE-RT, PB) Polyolefin Oxygen Resistant Three Layers Or Five Layers Extrusion Line

设备简介：

该生产线主要用于生产三层或五层阻氧耐热聚乙烯冷热水管材 (GB/T28799.2-2012) 更换或增加部分单元亦可生产三层或五层阻氧聚丁烯冷热水管材 (GB/T19473.2-2004) , 三层或五层阻氧管材解决了普通管材不能阻止氧气渗透，导致管道系统寿命缩短、安全性下降等问题，管材采用三层 (外层为 EVOH+ 中间层胶水 + 内层 PERT) 或管材采用五层 (外层 PERT+ 胶水 + 中间层 EVOH+ 胶水 + 内层 PERT) , 通过利用 EVOH 的阻隔特点来说实现管材的阻氧性能。

Brief introduction of equipment:

The production line is mainly used for the production of three or five layers of oxygen resistant polyethylene cold and hot water pipes (GB/T28799.2-2012). The replacement or addition of some units can also produce three or five layers of oxygen resistant polybutene cold and hot water pipes (GB/T19473.2-2004).Three or five layers of oxygen resistant pipes solve the problem that ordinary pipes can't prevent oxygen permeation.Causes the pipeline system to shorten the life, the safety and so on reduces the question and so on.The tube adopts three layers (outer layer is evoh interlayer glue inner layer pert) or pipe adopts five layers (outer layer pert glue intermediate layer evoh glue inner layer pert layer), through the use of evoh barrier characteristics to achieve the oxygen resistance of the pipe.

主要技术参数 Main technical parameter

生产线型号	主机型号	生产范围	最大牵引速度	最大生产能力	备注
Line Type	Extruder Type	Pipe Range(mm)	Max. Speed (m/min)	Max.Capacity(kg/h)	Remarks
MFH-PO32S	MFH-45/38P2/ MFH-45/33P(2 台)	16-32	20	120-200	

备注：以上规格参数如有变更，恕不另行通知。Note:The specifications are subject to change without prior notice.

MFH 系列纤维无规共聚聚丙烯 (PP-R) 复合管高速挤出生产线

Mfh Series Fiber Random Copolymerization Polypropylene (PP-R) Composite Pipe Energy-Saving And High Speed Extrusion Line.

设备简介：

该生产线主要用于生产纤维增强无规共聚聚丙烯复合管材 (CJ/T258-2007) , 采用两机或三机共挤，该管材成品与普通 PP-R 管材相比具有耐压强度高、高温变形小、膨胀系数低等优点。

Brief introduction of equipment:

This production line is mainly used to produce fiber reinforced random copolymerization polypropylene composite pipe (CJ/T258-2007). Co-extrusion with two or three extruders. Compared with ordinary PPR pipe, the finished product has the advantages of high compressive strength, low deformation at high temperature, low expansion coefficient and so on.



主要技术参数 Main technical parameter

生产线型号	主机型号	生产范围	最大牵引速度	最大生产能力	备注
Line Type	Extruder Type	Pipe Range(mm)	Max. Speed (m/min)	Max.Capacity(kg/h)	Remarks
MFH-LSBX63G	MFH-60/38G1/ MFH-45/38G2	20-63	25	150-220	
MFH-SSBX63G	MFH-45/38G2(三台)	20-63	25	150-220	
MFH-LSBX110G	MFH-60/38G2/ MFH-45/38G3	50-110	12	180-280	
MFH-SSBX110G	MFH-45/38G3(三台)	50-110	12	180-280	
MFH-LSBX160G	MFH-60/38G3/ MFH-50/38	50-160	8	200-350	
MFH-SSBX160G	MFH-50/38 (三台)	50-160	8	200-350	

备注：以上规格参数如有变更，恕不另行通知。Note:The specifications are subject to change without prior notice.



MFH 系列双向拉伸聚氯乙烯 (OPVC) 管材挤出生产线

Mfh Series Biaxial Oriented Polyvinyl Chloride (OPVC) Pipe Extrusion Line

设备简介：

该生产线主要用于生产双向拉伸聚氯乙烯 (OPVC) 给水管材 (CJ/T445-2014)，更换部分单元亦可生产埋地式高压电力电缆氯化聚氯乙烯 (CPVC) 套管 (QB/T2479-2000) 的替代产品，采用挤出生产的 UPVC 管材在线二次经特殊工艺将管材轴向与径向拉伸后，使得 PVC 分子链有规律排列，从而获得优异的机械 (强度、韧性、抗疲劳、抗冲等) 性能。

Brief introduction of equipment:


The production line is mainly used for production of polyvinyl chloride bidirectional stretch (OPVC) water supply pipe (CJ/T445-2014) or electrical wire sheath pipe, used extruded PVC-U pipe which extend the axial and radial direction, making the PVC molecular chain is arranged regularly, thus obtaining excellent mechanical (strength, toughness, resistance to fatigue, shock resistance, etc.)

主要技术参数 Main technical parameter

生产线型号 Line Type	主机型号 Extruder Type	生产范围 Pipe Range(mm)	最大牵引速度 Max. Speed (m/min)	最大生产能力 Max.Capacity(kg/h)	备注 Remarks
MFH-OPVC250	MFH-80/156	100-250	4	100-220	
MFH-OPVC400	MFH-80/156	200-400	2	150-300	
MFH-OPVC630	MFH-92/188	315-630	1	280-450	

备注：以上规格参数如有变更，恕不另行通知。Note: The specifications are subject to change without prior notice.



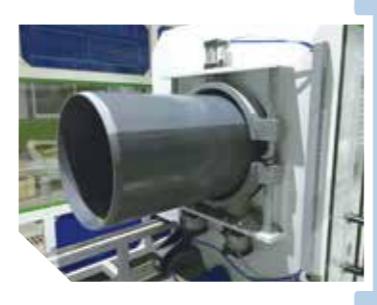

MFH 系列氯化聚氯乙烯 (CPVC) 管材挤出生产线

Mfh Series Chlorinated Polyvinyl Chloride (CPVC) Pipe Extrusion Line

设备简介：

该生产线主要用于生产埋地式高压电力电缆氯化聚氯乙烯 (CPVC) 套管 (QB/T2479-2000) 更换部分单元亦可生产给水用硬聚氯乙烯 (UPVC) 管材 (GB/T10002.1-2006)、生产埋地无压排污、排水用硬聚氯乙烯 (UPVC) 管材 (GB/T20221.1-2006)、低压输送灌溉用硬聚氯乙烯 (UPVC) 管材 (GB/T13664.1-2006)、建筑排水用硬聚氯乙烯 (UPVC) 管材 (GB/T5836.1-2006)、冷热水用氯化聚氯乙烯 (CPVC) 管材 (GB/T18993.2-2003)、工业用氯化聚氯乙烯 (CPVC) 管材 (GB/T18998.2-2003)

Performance and advantage:

The production line is mainly used for the production of buried high-voltage power cable chlorinated polyvinyl chloride (CPVC) casing (QB/T2479-2000).Changer some machine parts can produce (UPVC) pipe (GB/T10002.1-2006), unpressurized sewage discharge and drainage hard polyvinyl chloride (UPVC) pipe (GB/T20221.1-2006), low pressure transportation irrigation hard polyvinyl chloride (UPVC) pipe (GB/T13664.1-2006), construction drainage with hard polyvinyl chloride (UPVC) pipe (GB/T5836.1-2006), cold and heat water chlorinated polyvinyl chloride (CPVC) pipe (GB/T18993.2-2003), industrial chlorinated polyvinyl chloride (CPVC) pipe (GB/T18998.2-2003).

主要技术参数 Main technical parameter



生产线型号 Line Type	主机型号 Extruder Type	生产范围 Pipe Range(mm)	最大牵引速度 Max. Speed (m/min)	最大生产能力 Max.Capacity(kg/h)	备注 Remarks
MFH-PVC160	MFH-65/132	63-160	6	150-300	
MFH-PVC250	MFH-65/132	100-250	4	250-300	
MFH-PVC400	MFH-80/156	200-400	2	300-500	
MFH-PVC630	MFH-92/188	315-630	1	500-750	

备注：以上规格参数如有变更，恕不另行通知。Note:The specifications are subject to change without prior notice.





jWELL·MFH

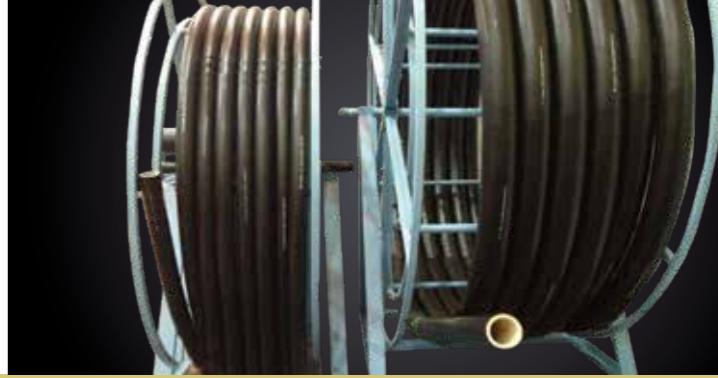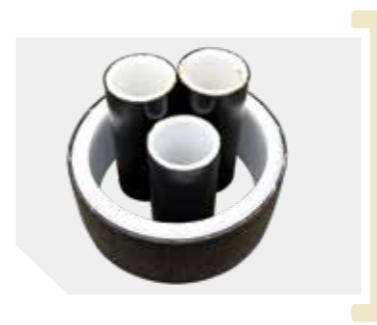

CE
TUV
CERT
ISO9001:2015

HDPE、PP、PVC 大口径卧式双壁波纹管生产线

HDPE/PP/PVC Horizontal Type Double Wall Corrugated Pipe Extrusion Line

设备简介：

HDPE/PP/PVC 双壁波纹管应用广泛。本公司自主研发的 HDPE 双壁波纹管生产线，拥有多项专利技术。自动化程度高，运行稳定，产量高。HDPE/PP 采用新型高效单螺杆挤出机，PVC 采用大型平双或锥双挤出机，挤出量大。成型机采用卧式结构，梭式传动，密封水冷结构，真空成型，可实现在线双层扩口。整线采用电脑人机界面控制，具有很高的自控性。

Brief introduction of equipment:

HDPE/PP/PVC horizontal type DWC pipe extrusion line produced by Jwell has many patents. Full automatic control, running stable, high capacity. HDPE/PP material use high efficient single screw extruder, and PVC material use conical twin screw extruder or parallel twin screw extruder. Horizontal type corrugator adopt advanced shuttle-type structure, closed water cooling system, on-line belling. Whole line is controlled by PLC computer.



主要技术参数 Main technical parameter

生产线型号	管材直径	生产能力	生产能力	最大牵引速度	总功率
Line Type	Pipe diameter(mm)	PVC output(kg/h)	HDPE output(kg/h)	Max. Speed (m/min)	Total power(kW)
JWSBW-160	90-160	150-250	200-300	6	135
JWSBW-250	110-250	250-350	250-350	5	280
JWSBW-500	200-400	650-750	250-500	3	550
JWSBW-800	500-800	/	1000-1100	3	680
JWSBW-1200	800-1200	/	1000-1200	1	800
JWSBW-1800	1200-1800	/	1000-1500	0.6	1100

备注：以上规格参数如有变更，恕不另行通知。Note:The specifications are subject to change without prior notice.

CHANGZHOU JWELL PIPE EQUIPMENT TECHNOLOGY CO.,LTD.

高压 RTP 编织复合管道生产线 / 钢丝缠绕管生产线

High Pressure Rtp Twisted Composite Pipe Extrusion Line

性能和优点：

热塑性塑料增强管 RTP 大部分是三层结构，内层是耐腐蚀耐磨损的聚乙烯管 (PE100)，中层是增强的缠绕层 (缠绕的材料有高强度合成纤维，玻璃纤维，碳纤维、金属铁片和细金属丝多种)，外层是保护用的聚乙烯 (PE100) 层。芳纶纤维增强 RTP 的工作压力可高达 9-14Mpa，爆破压力可高达 40Mpa。

Performance and feature:

The thermoplastic reinforced pipe RTP has three layers: the inner layer is anti-erosion and wearing-resistant PE pipe; the middle layer is reinforced twisting layer (the material is high-intension synthesized fiber, or glass fiber, carbon fiber or fine metal thread); the outer layer is PE for protection use. The most popular reinforce material is Aramid fiber. The pressure of Aramid fiber reinforced pipe is up to 9-14Mpa. The explode pressure can be 40Mpa.



主要技术参数 Main technical parameter

生产线型号	管材规格	配套挤出机	最大挤出量	总装机功率
Line Type	Model(mm)	Extruder	Output(kg/h)	Power(kW)
JWG-RTP-160	Ø63~Ø160	JWSGX65/38	120-300	160
JWG-RTP-250	Ø75~Ø250	JWSGX75/38	300-500	210
JWG-RTP-315	Ø110~Ø315	JWSGX75/38	300-500	210

备注：以上规格参数如有变更，恕不另行通知。Note:The specifications are subject to change without prior notice.

PE100 级聚乙烯管材公称压力和规格尺寸

PE100 给水用聚乙烯 (PE) 管材国家标准 (GB/T 13663-2018)

公称壁厚 en/mm								
标准尺寸比								
SDR9	SDR11	SDR13.6	SDR17	SDR21	SDR26	SDR33	SDR41	
管系列								
S4	S5	S6.3	S8	S10	S12.5	S16	S20	
"PE80 级公称压力 MPa"								
1.6	1.25	1.0	0.8	0.6	0.5	0.4	0.32	
"PE100 级公称压力 MPa"								
2.0	1.6	1.25	1.0	0.8	0.6	0.5	0.4	
16	2.3	—	—	—	—	—	—	
20	2.3	2.3	—	—	—	—	—	
25	3.0	2.3	2.3	—	—	—	—	
32	3.6	3.0	2.4	2.3	—	—	—	
40	4.5	3.7	3.0	2.4	2.3	—	—	
50	5.6	4.6	3.7	3.0	2.4	2.3	—	
63	7.1	5.8	4.7	3.8	3.0	2.5	—	
75	8.4	6.8	5.6	4.5	3.6	2.9	—	
90	10.1	8.2	6.7	5.4	4.3	3.5	—	
公称壁厚 en/mm								
标准尺寸比								
SDR9	SDR11	SDR13.6	SDR17	SDR21	SDR26	SDR33	SDR41	
管系列								
S4	S5	S6.3	S8	S10	S12.5	S16	S20	
"PE80 级公称压力 MPa"								
1.6	1.25	1.0	0.8	0.6	0.5	0.4	0.32	
2.0	1.6	1.25	1.0	0.8	0.6	0.5	0.4	
110	12.3	10.0	8.1	6.6	5.3	4.2	—	
125	14.0	11.4	9.2	7.4	6.0	4.8	—	
140	15.7	12.7	10.3	8.3	6.7	5.4	—	
160	17.9	14.6	11.8	9.5	7.7	6.2	—	
180	20.1	16.4	13.3	10.7	8.6	6.9	—	
200	22.4	18.2	14.7	11.9	9.6	7.7	—	
225	25.2	20.5	16.6	13.4	10.8	8.6	—	
250	27.9	22.7	18.4	14.8	11.9	9.6	—	
280	31.3	25.4	20.6	16.6	13.4	10.7	—	
315	35.2	28.6	23.2	18.7	15.0	12.1	9.7	7.7
355	39.7	32.2	26.1	21.1	16.9	13.6	10.9	8.7
400	44.7	36.3	29.4	23.7	19.1	15.3	12.3	9.8
450	50.3	40.9	33.1	26.7	21.5	17.2	13.8	11.0
500	55.8	45.4	36.8	29.7	23.9	19.1	15.3	12.3
560	62.5	50.8	41.2	33.2	26.7	21.4	17.2	13.7
630	70.3	57.2	46.3	37.4	30.0	24.1	19.3	15.4
710	79.3	64.5	52.2	42.1	33.9	27.2	21.8	17.4
800	89.3	72.6	58.8	47.4	38.1	30.6	24.5	19.6
900	—	81.7	66.2	53.3	42.9	34.4	27.6	22.0
1000	—	90.2	72.5	59.3	47.7	38.2	30.6	24.5
1200	—	—	88.2	67.9	57.2	45.9	36.7	29.4
1400	—	—	102.9	82.4	66.7	53.5	42.9	34.3
1600	—	—	117.6	94.1	76.2	61.2	49.0	39.2
1800	—	—	—	105.9	85.7	69.1	54.5	43.8
2000	—	—	—	117.6	95.2	76.9	60.6	48.8
2250	—	—	—	—	107.2	86.0	70.0	55.0
2500	—	—	—	—	119.1	95.6	77.7	61.2

注 : 公称压力按照 C=1.25 计算。

DIMENSIONS OF PIPES

Dimension specification for HDPE pipe refer to ISO 4427-2:2007

Material	SD6		SDR7.4		SDR9		SDR11		SDR13.6		SDR17		SDR21		SDR26		SDR33		SDR41	
PE80	PN25		PN20		PN16		PN12.5		PN10		PN8		PN6		PN5		PN4		PN3.2	
PE100	-		PN25		PN20		PN16		PN12.5		PN10		PN8		PN6		PN5		PN4	
dn	e	ID	e	ID	e	ID	e	ID	e	ID	e	ID	e	ID	e	ID	e	ID	e	ID
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
16	3.0	10.0	2.3	11.4	2.0	12.0	-	-	-	-	-	-	-	-	-	-	-	-	-	-
20	3.4	13.2	3.0	14.0	2.3	15.4	2.0	16.0	-	-	-	-	-	-	-	-	-	-	-	-
25	4.2	16.6	3.5	18.0	3.0	19.0	2.3	20.4	2.0	21.0	-	-	-	-	-	-	-	-	-	-
32	5.4	21.2	4.4	23.2	3.6	24.8	3.0	26.0	2.4	27.2	2.0	28.0	-	-	-	-	-	-	-	-
40	6.7	26.6	5.5	29.0	4.5	31.0	3.7	32.6	3.0	34.0	2.4	35.2	2.0	36.0	-	-	-	-	-	-
50	8.3	33.4	6.9	36.2	5.6	38.8	4.6	40.8	3.7	42.6	3.0	44.0	2.4	45.2	2.0	46.0	-	-	-	-
63	10.5	42.0	8.6	45.8	7.1	48.8	5.8	51.4	4.7	53.6	3.8	55.4	3.0	57.0	2.5	58.0	-	-	-	-
75	12.5	50.0	10.3	54.4	8.4	58.2	6.8	61.4	5.6	63.8	4.5	66.0	3.6	67.8	2.9	69.2	-	-	-	-
90	15.0	60.0	12.3	65.4	10.1	69.8	8.2	73.6	6.7</td											

企业风采：品质管理 技术研发 客户服务 国际交流 员工培训



Quality Control Technology Research Customer Service
International Communication Staff Training

Note:

